




# The Destroyer™ “Guide Series” Installation and Set-Up Instructions

## PARTS LIST


Item #	Qty	Description
1	1	Sled with backrest/dog door
2	1	RH roof panel
3	1	LH roof panel
4	4	Clip pin

## Tools Required:


No tools required

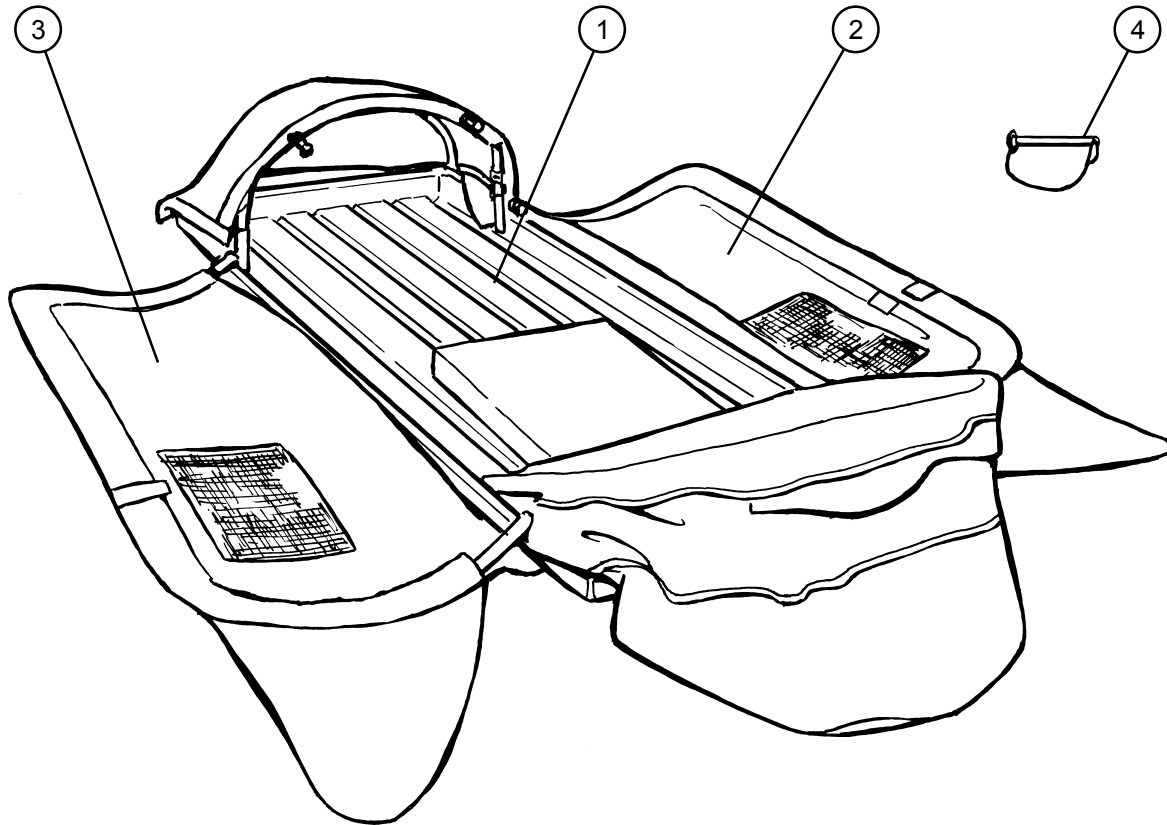


1. Attach left and right roof panels (item 1) to sled by inserting clip pins (item 2) through u-shaped hinge brackets (item 3) and then through roof panel tubing (item 4). Attach clip to pin. Make sure face shields (item 5) are at the same end as the backrest (item 6).

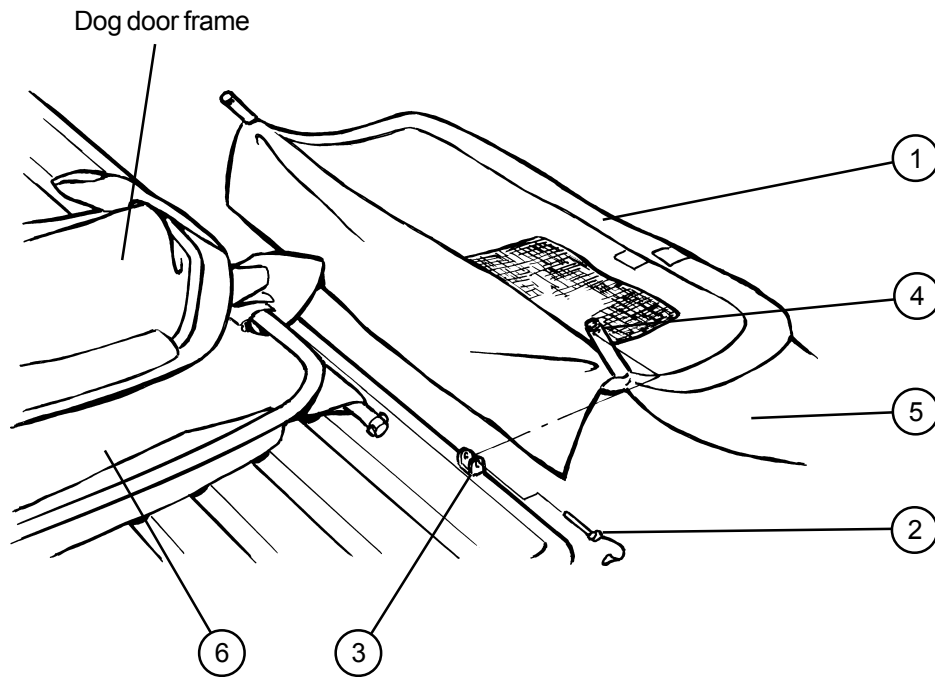

2. Unfold the backrest (item 1) and dog door frame (item 2).

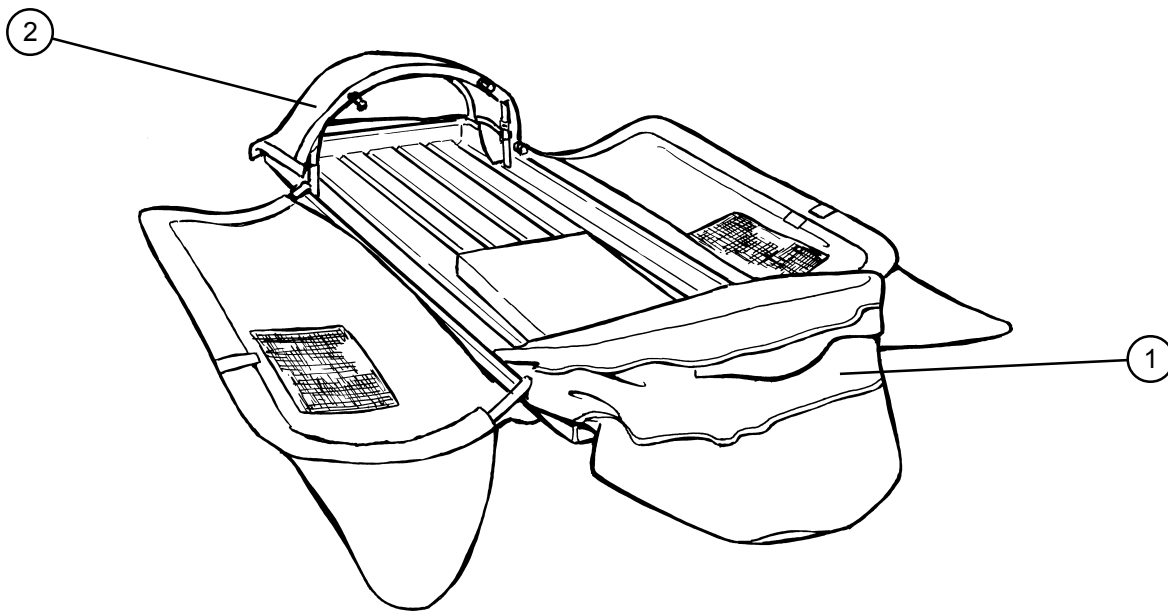


3. Fold roof panels (item 1) up and in to close the blind. Make sure face shields (item 2) are in place.

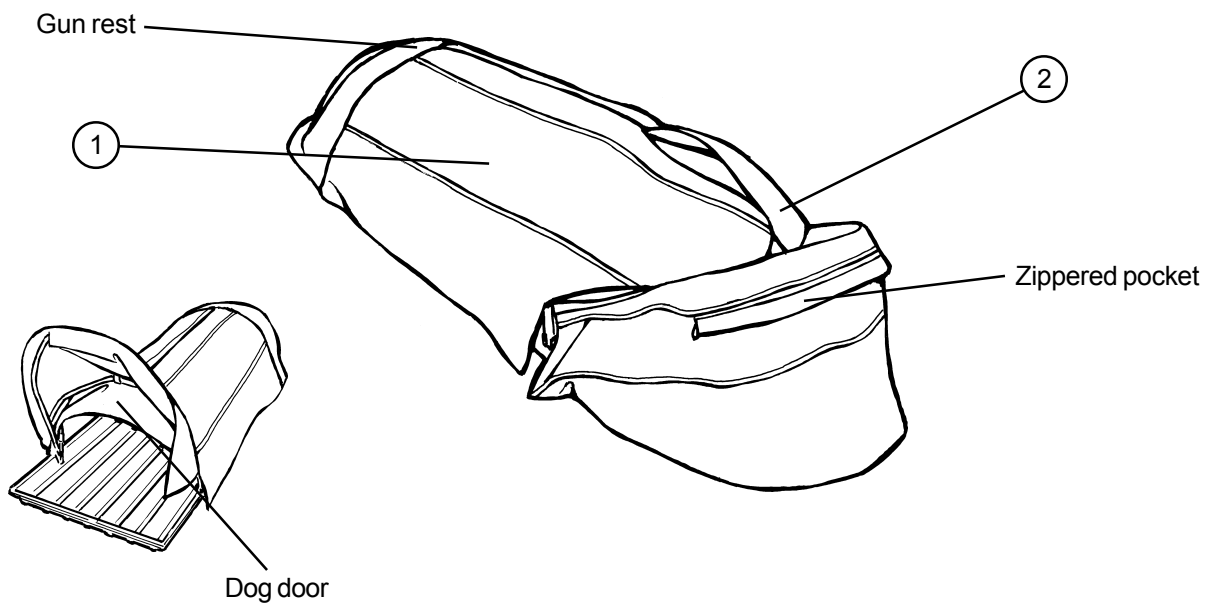

**To take down:**

Unfold the roof panels (leave attached) and fold down the backrest and dog door access. Fold the roof panels in.

**Optional:** The blind may be fitted with optional camouflage panels that slip over the backrest (item 1) and dog door frame (item 2) and roof panels (item 3).

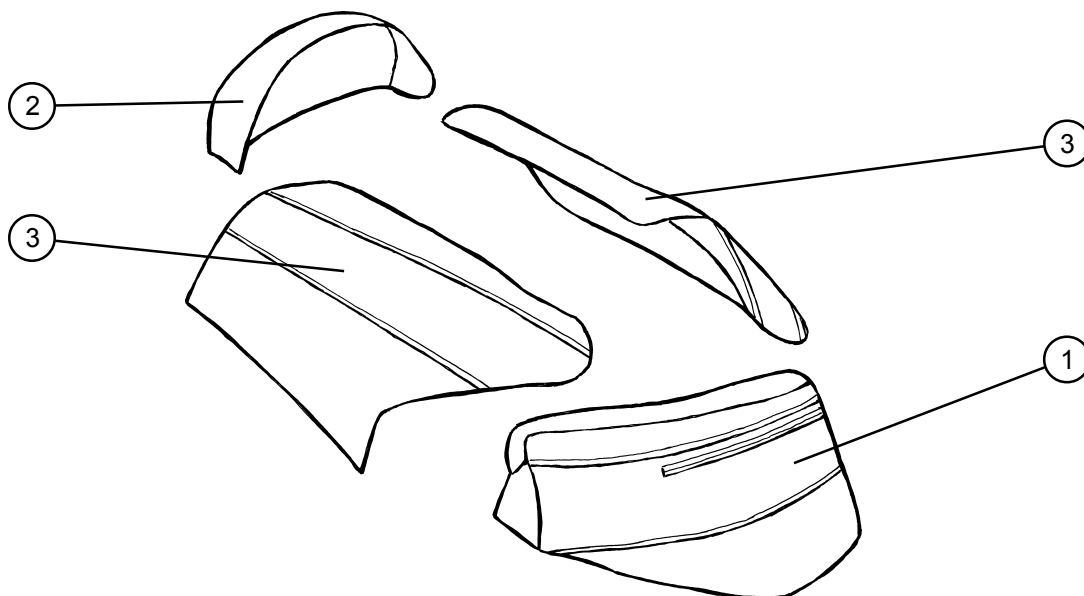

## **For your safety:**

- Never have your gun loaded when towing the blind across the field.
- Place blind on level ground. For secure footing and for extra warmth, place a piece of carpeting on the bottom of the sled.
- Practice using the blind before you enter the field.
- Keep gun barrel out in front of you at all times.
- Practice opening and closing the blind several times before you enter the field.
- **Caution:** Enter and exit your blind diagonally for your own safety. Do NOT try to step up and over.
- **Important Notice:** Do not use the top of the backrest to lift yourself out of the blind or damage to the frame will result.
- The use of ear plugs is always recommended.

## **Caring for your blind:**

### *Fabric:*

- To prevent mold and mildew, allow blind to dry before storing.
- Store blind in a safe place away from mice.
- Keep sharp objects away from the fabric.

### *Tubing:*

- Never overload blind with decoys and gear when towing your blind in the field.
- To stack the the blind completely flat for transport, disconnect the frame from the sled by removing clip pins.
- Do not stack heavy objects on top of the blind without first removing frame from hinge brackets.
- Never force the roof panels or frames when setting up or taking down.